

127.0.0.1 - PuTTY

```
*****  
*****  
*****#####*****  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
**#####**  
*****  
*****
```

Telnet Administration
SAP Java EE Application Server v7.50


User name: administrator
Password:

Welcome to server node 8551350.

>

Undeploy the SAP PowerConnect Java UI component using the following command.

```
undeploy vendor=com.powerconnect5 name=spcj_wd
```

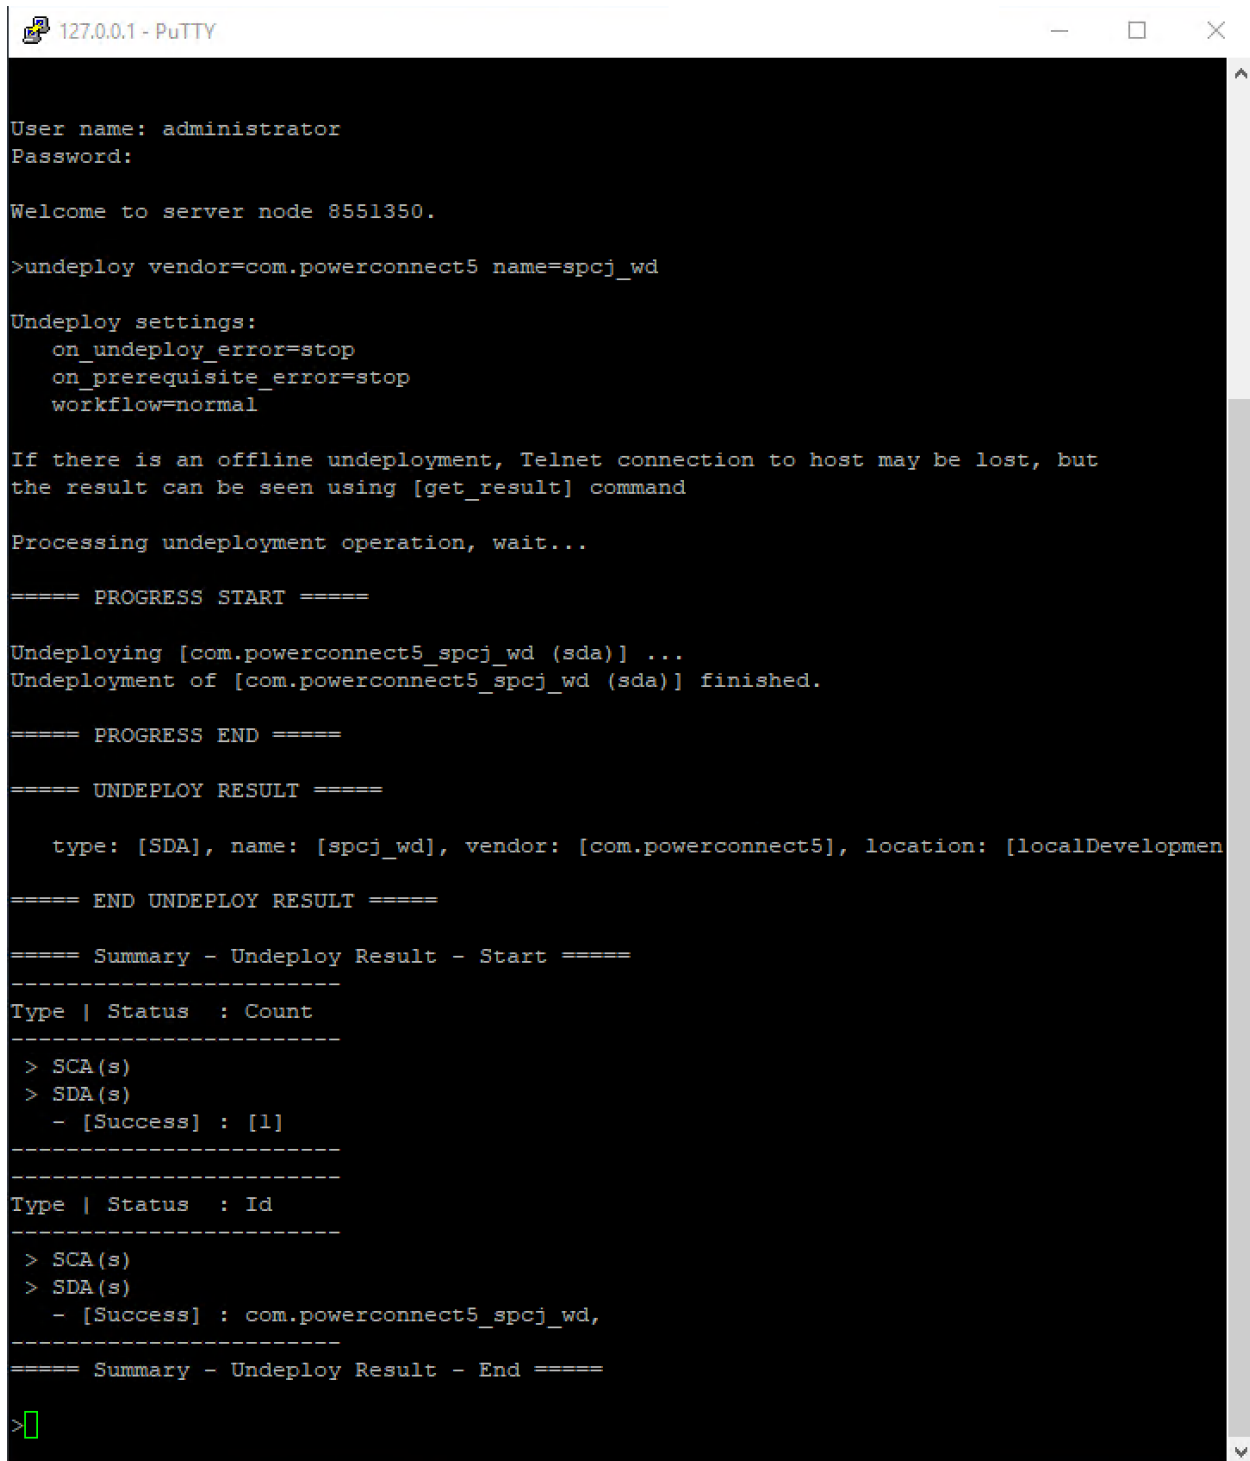

```
127.0.0.1 - PuTTY
User name: administrator
Password:
Welcome to server node 8551350.
>undeploy vendor=com.powerconnect5 name=spcj_wd

Undeploy settings:
  on_undeploy_error=stop
  on_prerequisite_error=stop
  workflow=normal

If there is an offline undeployment, Telnet connection to host may be lost, but
the result can be seen using [get_result] command

Processing undeployment operation, wait...

===== PROGRESS START =====

Undeploying [com.powerconnect5_spcj_wd (sda)] ...
Undeployment of [com.powerconnect5_spcj_wd (sda)] finished.

===== PROGRESS END =====

===== UNDEPLOY RESULT =====

  type: [SDA], name: [spcj_wd], vendor: [com.powerconnect5], location: [localDevelopmen

===== END UNDEPLOY RESULT =====

===== Summary - Undeploy Result - Start =====
-----
Type | Status  : Count
-----
> SCA(s)
> SDA(s)
  - [Success] : [1]
-----

Type | Status  : Id
-----
> SCA(s)
> SDA(s)
  - [Success] : com.powerconnect5_spcj_wd,
-----

===== Summary - Undeploy Result - End =====

>
```

Check the logs to ensure it undeployed correctly.

Undeploy the app component using the following command.

```
undeploy vendor=com.powerconnect5 name=spcj_app
```

```
>undeploy vendor=com.powerconnect5 name=spcj_app

Undeploy settings:
  on_undeploy_error=stop
  on_prerequisite_error=stop
  workflow=normal

If there is an offline undeployment, Telnet connection to host may be lost, but the result can be seen using [get_result] command

Processing undeployment operation, wait...

===== PROGRESS START =====

Undeploying [com.powerconnect5_spcj_app (sda)] ...
Undeployment of [com.powerconnect5_spcj_app (sda)] finished.

===== PROGRESS END =====

===== UNDEPLOY RESULT =====

  type: [SDA], name: [spcj_app], vendor: [com.powerconnect5], location: [localDevelopment], version: [20200611061016], status: [Success], description: []

===== END UNDEPLOY RESULT =====

===== Summary - Undeploy Result - Start =====
-----
Type | Status  : Count
-----
> SCA(s)
> SDA(s)
  - [Success] : [1]
-----

Type | Status  : Id
-----
> SCA(s)
> SDA(s)
  - [Success] : com.powerconnect5_spcj_app,
-----

===== Summary - Undeploy Result - End =====

>
```

If you are completely removing the application you should also undeploy the spcj_db app using the following command. This will remove all of the database tables and their contents that are used by PowerConnect Java agent.

If you are undeploying, and redeploying to refresh the application or upgrade it, you can skip this step and leave the database intact to avoid setting up and configuring the application from the beginning. Skipping this step will leave the database tables and contents in place, including the configuration.

Undeploy the database tables and contents using the following command.

```
undeploy vendor=com.powerconnect5 name=spcj_db
```